

# Island Falls

ADJUSTABLE MASSAGE HAND SHOWER  
& SUNFLOWER SHOWERHEADS

## ShowerTek

Model ST300


### PRODUCT & CONNECTION OVERVIEW



**Have A Problem? Need Assistance?**  
**DO NOT RETURN YOUR PRODUCT TO THE STORE!**

We are here to help! Please contact us if you have any questions or experience any problems with your product or installation.

1-800-776-6364 Barn to 5pm Pacific Time [www.showertek.com](http://www.showertek.com)

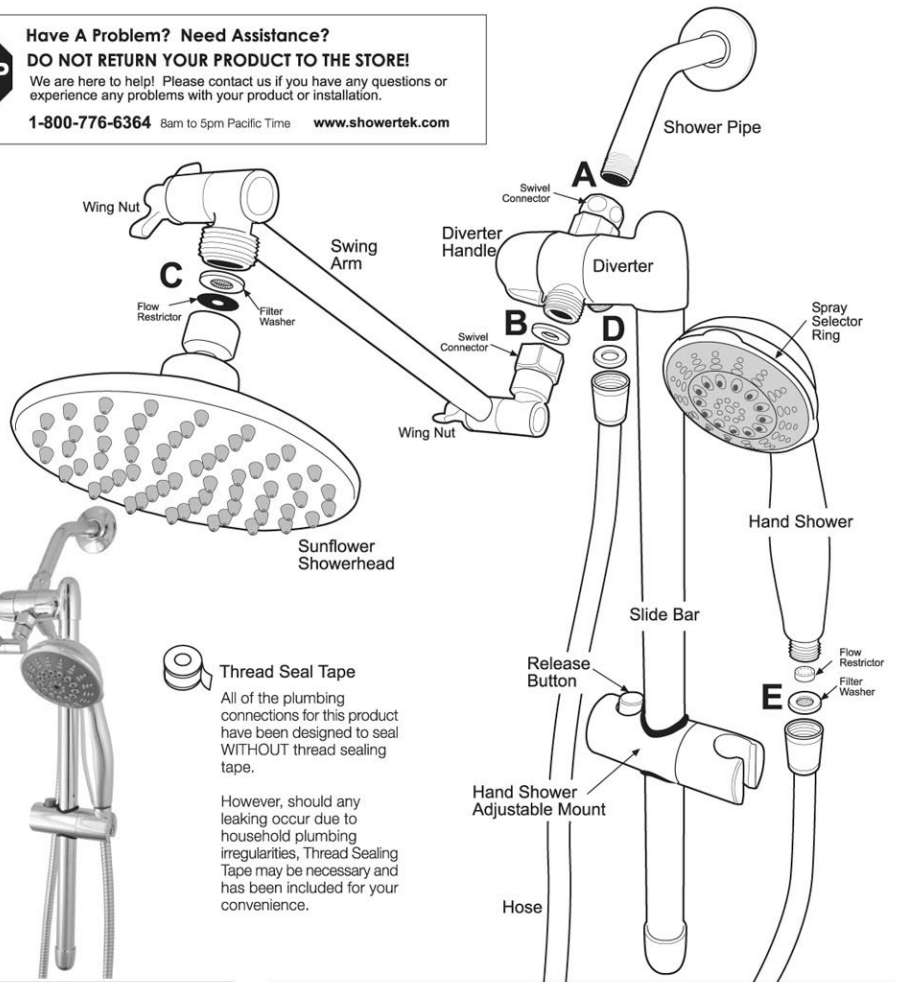

#### Thread Seal Tape

All of the plumbing connections for this product have been designed to seal **WITHOUT** thread sealing tape.

However, should any leaking occur due to household plumbing irregularities, Thread Sealing Tape may be necessary and has been included for your convenience.

#### TIP:

##### Leak Free Connections

Should you experience leaking in any of the plumbing connections after assembly:

1. Make sure the connection is screwed together tightly and that screw threads are not crossed or damaged.

2. Disassemble the connection and make sure a rubber washer is present. Make sure the washer is seated properly and not damaged.

**Note:** Connections A and B have factory installed, permanent washers - they do not require a separate, flat washer.

3. Tighten the connection.

4. If the connection still leaks, Thread Sealing Tape will be required.

#### Thank you for your purchase

With proper care and usage, this combination showerhead should provide many years of excellent and enjoyable service. Should you experience any problems please see the separate warranty card for warranty and service information. Please do not hesitate to contact us with any problems or questions.

**Read and become familiar with ALL instructions in this guide before installing this product.**



#### IMPORTANT SAFEGUARDS

- Use this product only as instructed.
- Do not hang any objects from the extended Sunflower Swing Arm.
- Slide Bar should be free from any soap, shampoo or cleaning agent so that Hand Shower Adjustable Mount maintains proper grip on bar.
- If the Swing Arm Wing Nuts are not tightened sufficiently, arm could droop and injury could result. Please inspect the Wing Nuts upon initial arm adjustment for proper tightness. Periodic inspection of the Wing Nuts is recommended.


#### FLOW CONTROL

Government law mandates that maximum water flow be limited to 2.5 gallons per minute. This product contains 2 Flow Restrictor components that are responsible for this limitation.

The Flow Restrictors may **ONLY** be removed for product use in low water pressure areas.


##### Sunflower

The Flow Restrictor is located in the female, threaded connector on the Sunflower Showerhead. It is a black plastic disk hidden underneath the visible, black rubber Filter Washer.

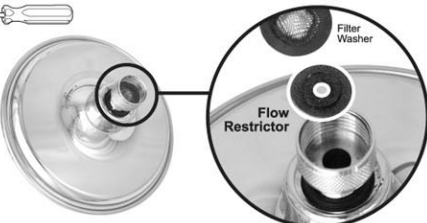

##### Hand Shower

The Hand Shower Flow Restrictor is located in the threaded connector at the base. The small, white plastic cylinder is easily pulled out for removal.

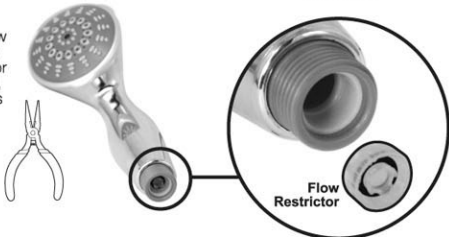

#### PREPARATION

##### Remove Existing Showerhead

Your existing showerhead may be screwed tightly to your shower pipe - a wrench or pliers may be required to unscrew it. Take care not to damage the shower pipe - especially the screw threads - when removing the existing showerhead.

1. **Unscrew existing showerhead.**

2. **Clean Shower Pipe threads**

Remove any remaining thread seal tape, putty or scale build-up from the threads and open-end of the shower pipe. The threads should be bare and clean.

#### ASSEMBLY


##### 1 Connection A - Attach Slide Bar To The Shower Pipe



##### Note:

If leaking occurs after this connection is made, Thread Seal Tape will be required.

Wrap plumbing threads with several turns of Thread Seal Tape and reassemble.

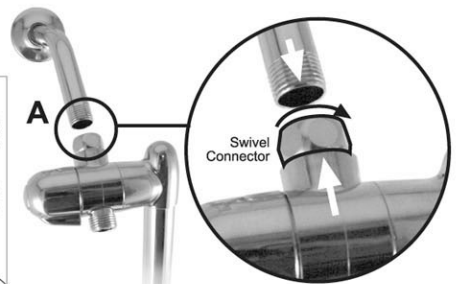

**Tip:** To prevent marring, place a soft cloth between wrench and Swivel Connector.

##### 2 Connection B - Attach Swing Arm To Slide Bar



##### Tip:

To prevent marring, place a soft cloth between wrench and Swivel Connector.

