FLOW CONTROL

Government law mandates that maximum water flow be limited to 2.5 gallons per minute. This product contains 2 Flow Restrictor components that are responsible for this limitation.

The Flow Restrictors may ONLY be removed for product use in low water pressure areas.

Rain Shower

The **Flow Restrictor** is located in the female, threaded connector on the Rain Shower Showerhead. It is a black plastic disk hidden underneath the visible, black rubber Filter Washer.

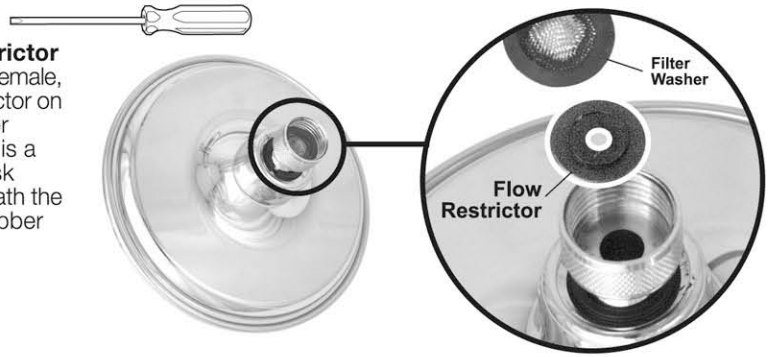

Hand Shower

The Hand Shower **Flow Restrictor** is located in the threaded connector at the base. The small, white plastic cylinder is easily pulled out for removal.

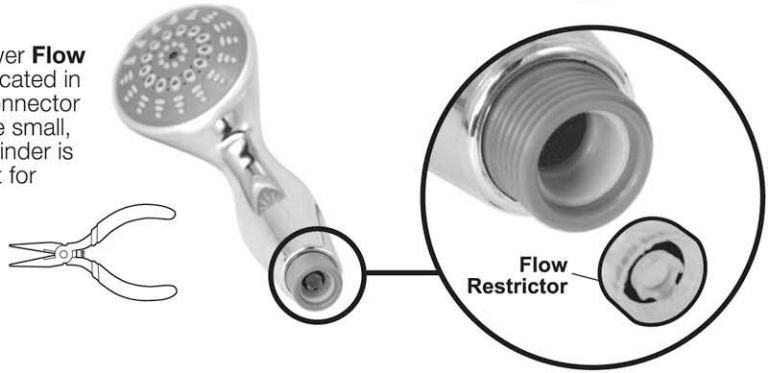

PREPARATION

Remove Existing Showerhead

Your existing showerhead may be screwed tightly to your wall shower pipe - a wrench or pliers may be required to unscrew it. Take care not to damage the shower pipe - especially the screw threads - when removing the existing showerhead.

1. Unscrew existing showerhead.

2. Clean Shower Pipe threads

Remove any remaining thread seal tape, putty or mineral build-up from the threads and open-end of the shower pipe. The threads should be bare and clean.



ASSEMBLY

1 Connection A - Attach Slide Bar To The Shower Pipe

This connection should be leak free. If any leaking occurs after assembly, please see Leak Free Connections, page 2.



Note:

If leaking occurs after this connection is made, Thread Seal Tape may be required.

Disassemble connection, wrap plumbing threads with several turns of Thread Seal Tape and reassemble.

Repeat if leaking still occurs.

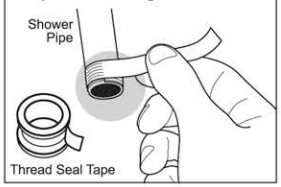

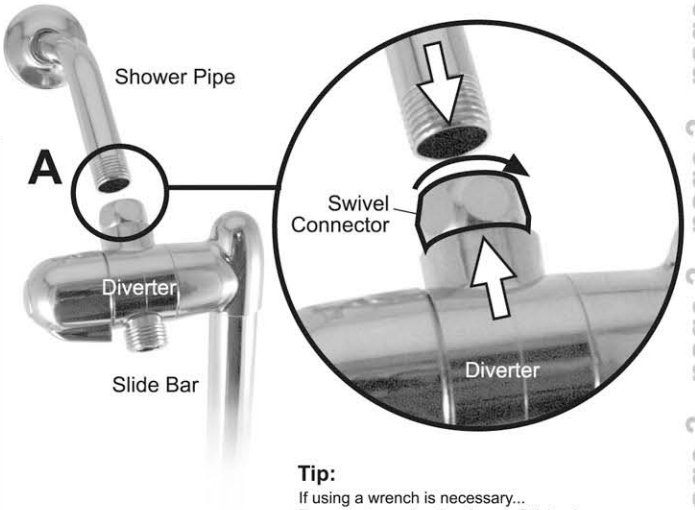

Tip:

If using a wrench is necessary...
To prevent marring the chrome finish, place a soft cloth (wash cloth) between the jaws of the wrench and the Swivel Connector.

2 Connection B - Attach Swing Arm To Slide Bar

This connection should be leak free. If any leaking occurs after assembly, please see Leak Free Connections, page 2.



Tip:

If using a wrench is necessary...
To prevent marring the chrome finish, place a soft cloth (wash cloth) between the jaws of the wrench and the Swivel Connector.

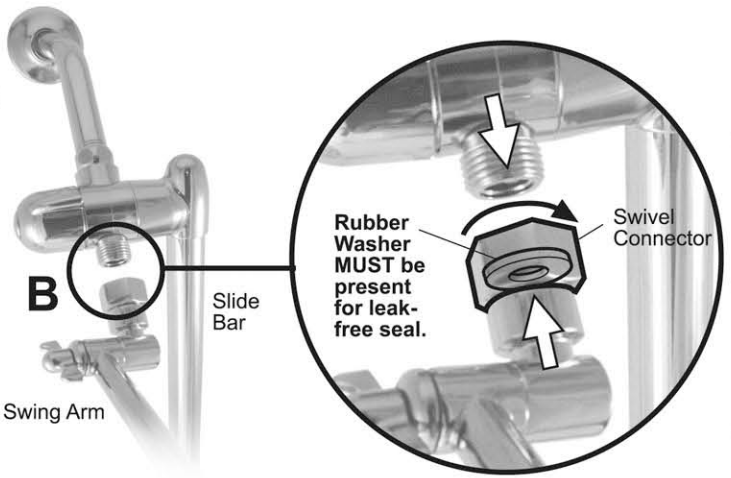

Questions? Assistance?

Do you have questions about the installation or functions of this product?

1-800-776-6364
M-F 8am to 5pm PST

ShowerTek, Inc.

www.showertek.com